



Amar Paints

AP HR 250 Heat Resistant Paint (250C)

PRODUCT DATA

DESCRIPTION	A single pack silicone modified resin based heat resistant coating containing heat resistant pigments
RECOMMENDED USE	Recommended for application on Exterior of Chimneys, Stacks, Ovens, Silencers and any other metal surface where dry heat resistance upto 250C is required. Being silicone modified it also gives excellent protection against weathering conditions.

PHYSICAL DATA

COLOUR	Aluminium / Black
FINISH	Smooth & Lustrous
SOLIDS BY VOLUME	40 ±3%
THEORETICAL SPREADING RATE	12 sq.mt / lt. at recommended DFT of 30 µ
FLASH POINT	Above 23°C
DRYING	SURFACE DRY : 1-2 hours
CHARCATERISTICS (At 65% Relative Humidity & at 30°C)	HARD DRY : 24 hours.
SHELF LIFE	6 months

APPLICATION DATA


APPLICATION	By Brush / By Air Spray
THINNER	Type 101 Thinner
RECOMMENDED DFT	20 –35 µ
OVERCOATING INTERVAL	MIN : 24 hours MAX: Indefinite
COMPATIBILITY	Can be top coated by itself and no other system.

SURFACE PREPARATION	The surface should be moisture free, oil and dust free before application.
---------------------	--

HEALTH & SAFETY	This is a solvent based paint and care should be taken to avoid inhalation of spray mist or vapour as well as contact between the wet paint and exposed skin or eyes.
-----------------	---

Amar Paints

D-9/10, Doshi Ind. Est, Navghar Road, Bhayander (E), Dist. Thane
Phone: +91-22- 2874 3847, 28164978 Fax: +91-22-2874 3847 Mobile: 09821352724
Email: mehul.amarpaints@gmail.com info@amarpaints.com
Website: www.amarpaints.com

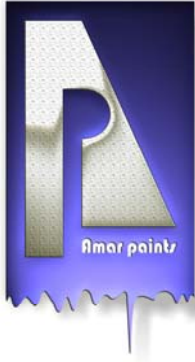

Amar Paints

APPLICATION METHOD

Stir the paint thoroughly to attain homogeneity. Add Thinner Type 101 into the mix, if required, depending on application method, and stir thoroughly for few minutes. Strain the paint through Nylon filter cloth and apply uniformly over the surface. All equipments used for above should be properly cleaned.

Application: By Brush / By Air Spray

For Brush application, a maximum of 5%, if required, is to be added. Apply uniformly in criss-cross manner and ensure there are no misses. Use quality brushes for paint application.

For Air Spray application:

Thinner : Type 101

Addition: 10-15%

Nozle Orifice: 1.2 -1.4 mm

Nozzle Pressure: 40-70 p.s.i

NOTES

1. Do not apply paint when temperature falls below 10° C or rises above 50° C and when Relative Humidity is above 85%. Do not apply during rain, fog, or mist.
2. Brushes and spray equipment should be cleaned with AP's recommended thinner otherwise equipment is liable to be damaged.
3. Shelf life indicated is minimum for this Product and it is subjected to re-inspection thereafter. Individual component is required to store in cool, dry and covered condition, away from heat and ignition.

DISCLAIMER

To the best of our knowledge, the technical data in our literature are true and accurate at the date of issuance but are subject to change without prior notice. We guarantee our product to conform to the specifications contained therein. WE MAKE NO OTHER WARRANTY OR GUARANTEE OF ANY KIND, EXPRESSED OR IMPLIED, INCLUDING MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE. Liability, if any, is limited to the replacement of the product or refund of the purchase price. LABOR OR COST OF LABOR AND OTHER CONSEQUENTIAL DAMAGES ARE HEREBY EXCLUDED.

Amar Paints

D-9/10, Doshi Ind. Est, Navghar Road, Bhayander (E), Dist. Thane
Phone: +91-22- 2874 3847, 28164978 Fax: +91-22-2874 3847 Mobile: 09821352724
Email: mehul.amarpaints@gmail.com info@amarpaints.com
Websitt: www.amarpaints.com